



The Right Connection®

Data Sheet

Globe Valves

1½" and 2½" sizes for pressures up to 300 PSI (2069 kPa)

SGV150, SGV250 SGVF150, SGVF250



cast finish shown


Straight Globe

- 1½" and 2½" sizes for pressures up to 300 PSI (2069 kPa)
- double female NPT inlet and outlet or female NPT inlet and male hose thread outlet *
- aluminum handwheel
- ideal for wet and combination systems
- used with a fire hose rack assembly or as a fire department outlet connection
- alloy = C84400, C83600, C36000
- manufactured in the USA

available finish:

- cast (standard)
- polished - P
- chrome - C



Dimensions

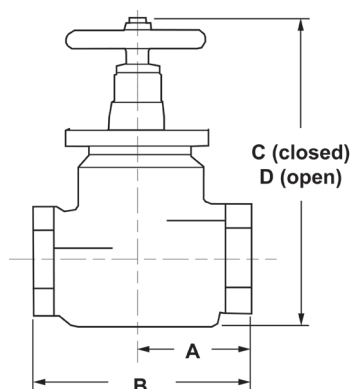

| Size | A | B | C (closed) | D (open) | Wt. in Lbs. |
|------|---------|---------|------------|----------|-------------|
| 1½" | 2-3/8" | 4-3/4" | 7-1/4" | 8" | 5 |
| 2½" | 3-9/32" | 6-9/16" | 7-3/8" | 8-1/8" | 9.3 |

Technical Info

Globe Valves

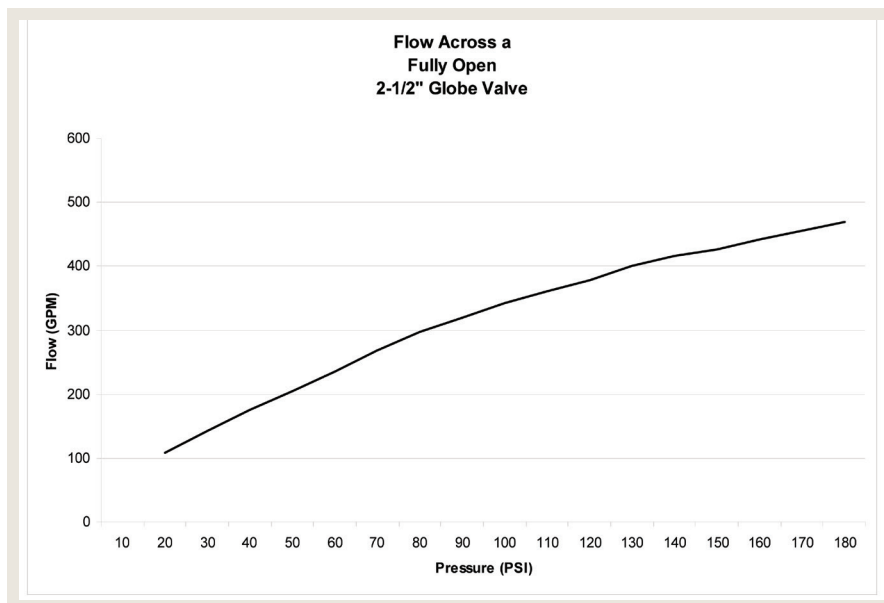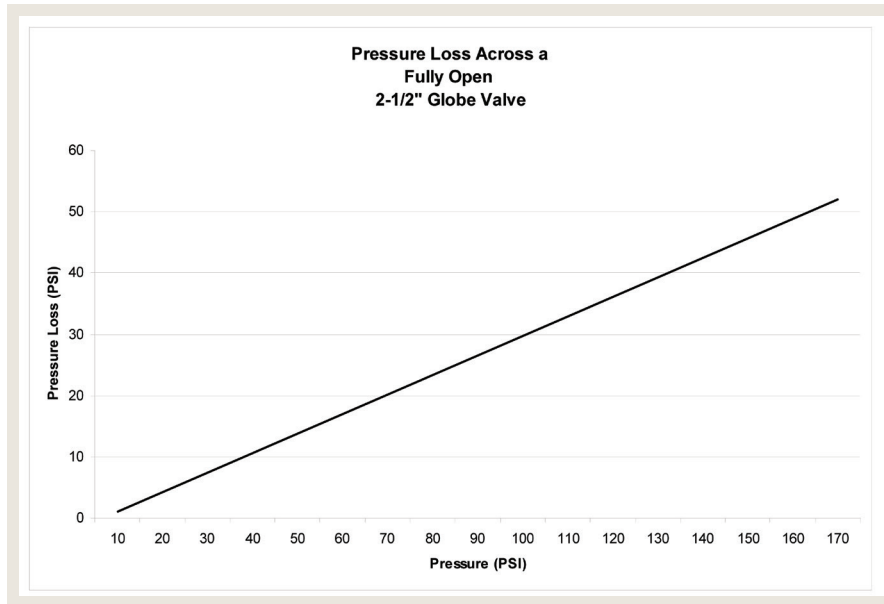

This information is only a general guideline. The company reserves the right to change any portion of this information without notice. Terms and conditions of sale apply and are available on request.

Dixon Fire

ph: 410.778.2008 • 877.712.6179
fx: 410.778.4702 • 800.283.4966
dixonvalve.com